


MARK HEAT PUMP SPLIT UNIT

- Self-cleaning function
- Self-diagnosis function
- Cooling medium R32
- High density filter
- Standard remote control with temperature sensor



25 dB(A)
Extrem stil
(2.64~5.28 kW)

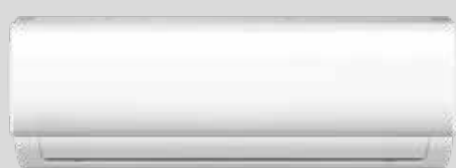

WALL UNIT HKEU 353 HKEU 553

| | | |
|---------------------------|-------------------|-------------------|
| Rated capacity (cooling) | 3,5 kW | 5,3 kW |
| Rated capacity (heating) | 4,1 kW | 6,1 kW |
| Suitable for a room up to | 45 m ² | 65 m ² |

| | | |
|----------------|-----------|-----------|
| Order number | 0699601 | 0699602 |
| Price per stuk | € 510,- | € 695,- |
| Price of 5 pc. | € 2.500,- | € 3.400,- |



For more information, downloads and videos, go to the Mark Heat Pump Split Unit page on our website.

| | Indoor unit model | | HKEU 353 | HKEU 533 |
|---|--------------------|-------------------|---------------------------|----------------------------|
| | Outdoor unit model | | HCNMX 353 | HCNI 533 |
| Type | | | DC-Inverted heat pump | |
| Control | | | Infra-red | |
| Rated capacity (T=+35 °C) | | kW | 3.52 (1.11~4.16) | 5.28 (1.82~6.13) |
| Rated absorbed power (T=+35 °C) | | KW | 1.21 (0.13~1.58) | 1.54 (0.14~2.36) |
| Rated energie efficiency coefficient | | EER | 2.91 | 3.43 |
| Seasonal energy efficiency class | Cooling | 626/2011 | A++ | A++ |
| Seasonal energy efficiency index | | SEER | 6.1 | 7.1 |
| Annual energy consumption | | kWh/a | 221 | 256 |
| Theoretical load (Pdesignc) | | kW | 3.60 | 5.20 |
| Rated capacity (T=+7 °C) | | kW | 3.81 (1.08~4.22) | 5.57 (1.38~6.74) |
| Rated absorbed power (T=+7 °C) | | kW | 1.09 (0.10~1.68) | 1.48 (0.20~2.41) |
| Rated energie performance coefficient | | COP | 3.50 | 3.76 |
| Energy efficiency class (average season) | Heating | 626/2011 | A+ | A+ |
| Seasonal energy efficiency class index (average season) | | SCOP | 4.0 | 4.0 |
| Annual energy consumption | | kWh/a | 945 | 1435 |
| Theoretical load (Pdesignc) @-10 °C | | kW | 2.70 | 4.10 |
| Operating limits (outside temperature) | Cooling | °C | -15~50 | |
| | Heating | °C | -15~30 | |
| Electrical data | | | | |
| Power supply | Outdoor unit | Ph-V-Hz | 1Ph-220/240V-50Hz | |
| power cable | | Type | 3 x 2.5 mm ² | 3 x 4 mm ² |
| Indoor and outdoor unit communication cable | | Type | 5 x 1.5 mm ² | 5 x 1.5 mm ² |
| Refrigerant circuit | | | | |
| Refrigerant (GWP) | | | R32(675) | R32(675) |
| Diameter of refrigerant piping on liquid/gas | | mm (inches) | Ø6.35(1/4") - Ø9.52(3/8") | Ø6.35(1/4") - Ø12.74(1/2") |
| Max splitting length | | m | 25 | 30 |
| Max height difference I.U./O.U. | | m | 10 | 20 |
| Split length without additional charge | | m | 5 | 5 |
| Additional load | | g/m | 12 | 12 |
| Indoor unit specifications | | | | |
| Dimensions | LxDxH | mm | 805x194x285 | 957x213x302 |
| Net weight | | Kg | 7.6 | 10 |
| Sound pressure level (I.U.) | Hi/Me/Lo | dB(A) | 40.5/34.5/25 | 44/37/25 |
| Sound power level (I.U.) | Hi | dB(A) | 55 | 55 |
| Treated air volume | Hi/Me/Lo | m ³ /h | 540/430/314 | 840/680/540 |
| Motor power (Output) | | W | 40 | 36 |
| Outdoor unit specifications | | | | |
| Dimensions | LxDxH | mm | 720x270x495 | 800x333x554 |
| Net weight | | Kg | 23.2 | 34 |
| Sound pressure level (O.U.) | | dB(A) | 56 | 56 |
| Sound power level (O.U.) | | dB(A) | 63 | 61 |
| Treated air (Max) | | m ³ /h | 1800 | 2500 |
| Motor power (Output) | | W | 63 | 63 |

INDOOR & OUTDOOR MODELS

Remote control included as standard.



CONTACT US

MARK CLIMATE TECHNOLOGY
Postbus 13
9640 AA VEENDAM
The Netherlands

Tel.: +31(0)598 656 600
Email: info@mark.nl